

Integrated Blinds

www.integratedblinds.com

Manual tilting only (top or bottom)

Product-line 1244


Slat width 12,5 mm, PVC profiles



Blind operating mechanism at Top of window for low windows or at Bottom for windows high in wall. Depth of unit 17,6 mm for slim double-glazing window system. New fine 12,5 mm wide blind slats. Frame, headrail and bottom channel from PVC for superior thermal and acoustic insulation.

Options

Orientation side	1102	Bottom
	1105	Top
Orientation system	1231	Magnetic handle

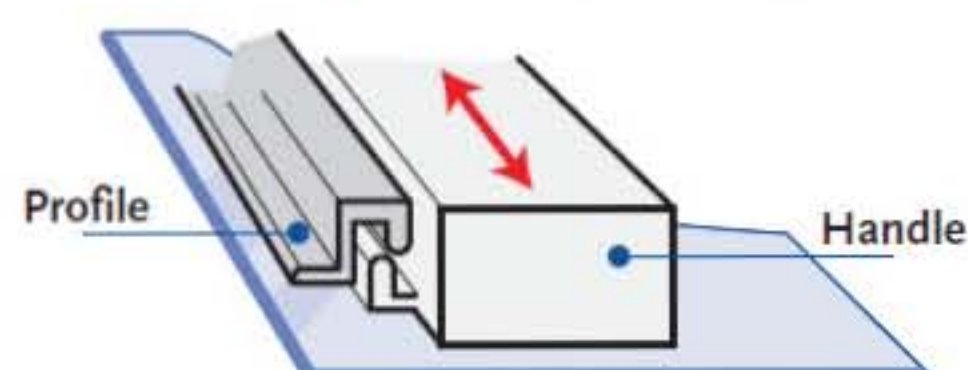

Properties

Slats	Material	Crowned high tensile aluminium
	Size	Width 12,5 mm
Cords	Cords	Polyester 1,3 mm
	Ladder string	Polyester width 15 mm Distance between ladder rungs 10 mm

Integral Blinds | Integrated Blinds | Interstitial Blinds

Sealed Unit Blinds in between Double Glazing

Integrated Blinds


www.integratedblinds.com

Product-line 1244

Manual tilting only (top or bottom)

Slat width 12,5 mm, PVC profiles

General topics system AC2

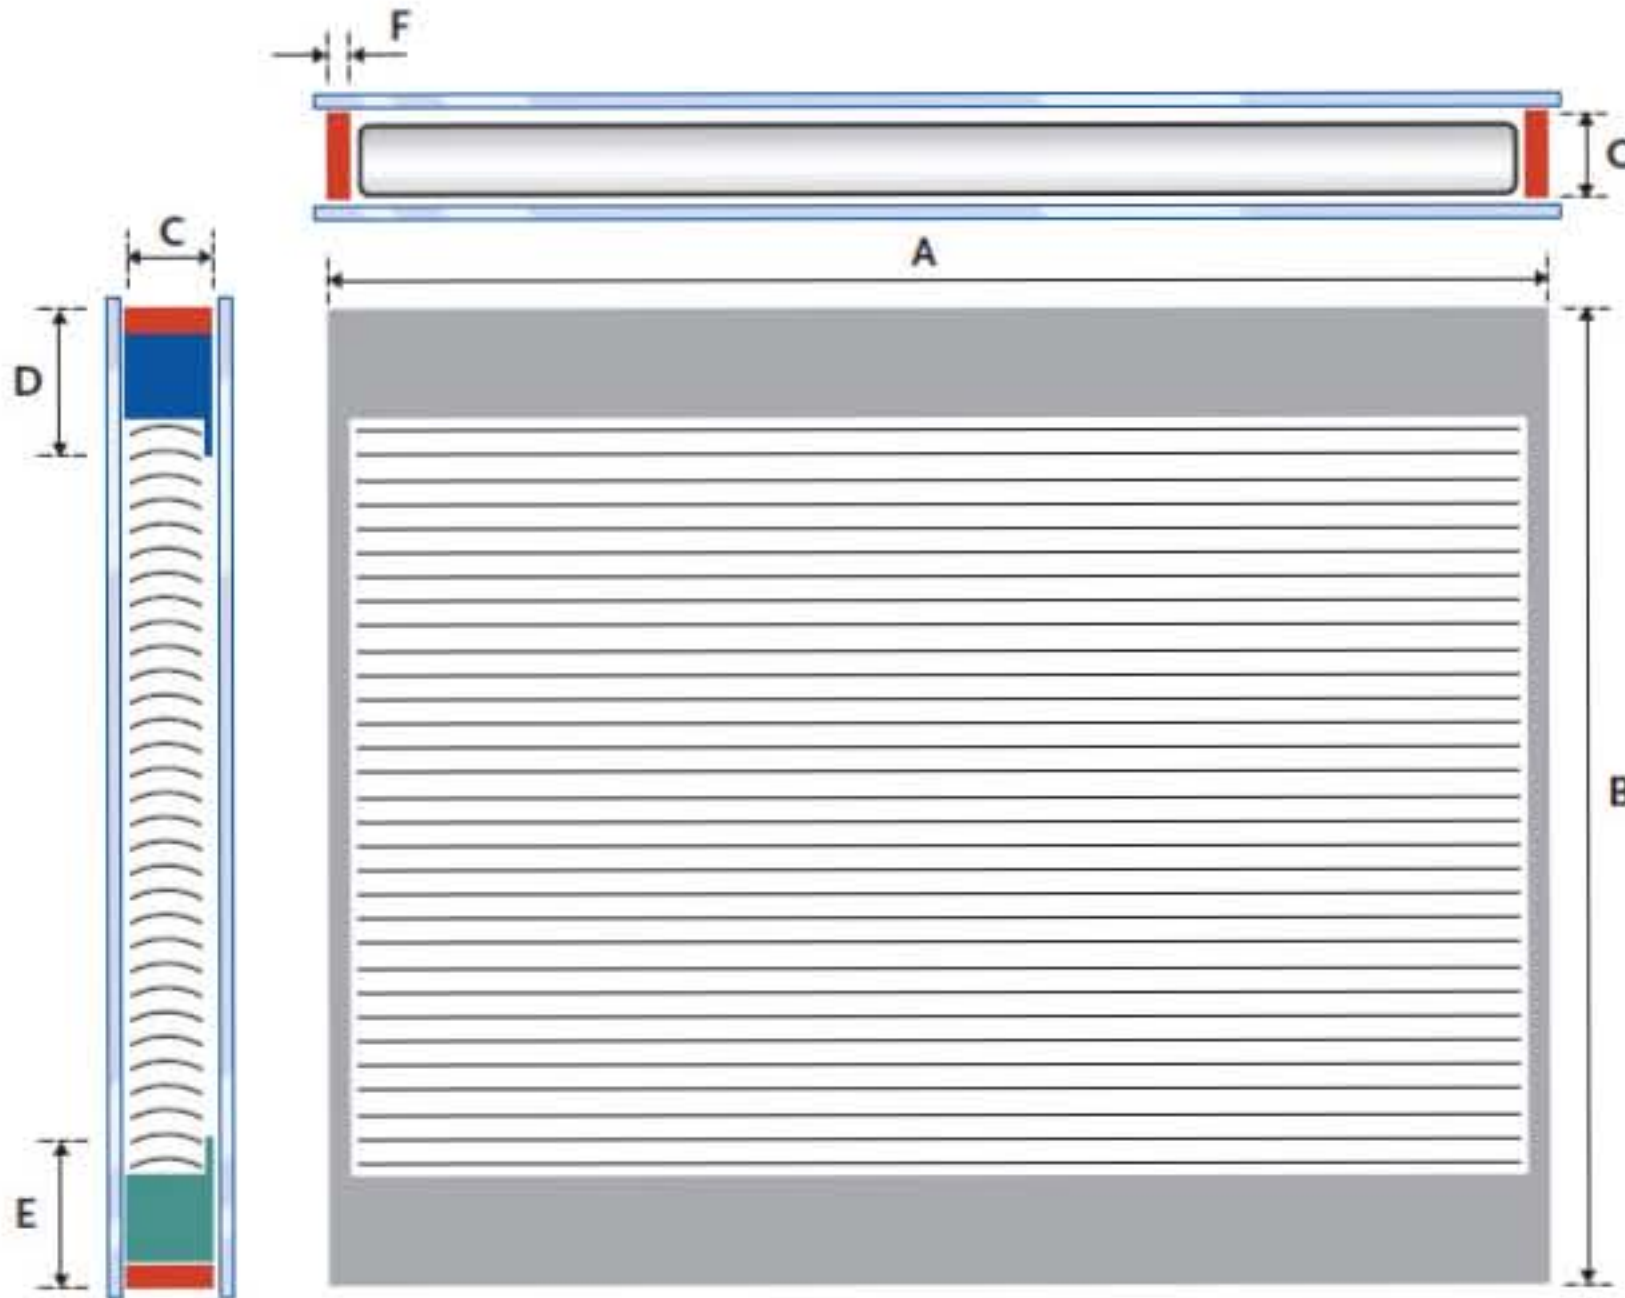


Ref.	Description	Size in mm
A	Width	As needed ¹⁾
B	Height	As needed ¹⁾
C	Depth	17,6
D	Top	40,0
E	Bottom	40,0
F	Side	8,0

- B
- Head rail
 - Bottom channel
 - Frame


Limitations in cm ¹⁾		
	Width	Height
Maximum	200	220
Minimum	30	50

Orientation sides

1102

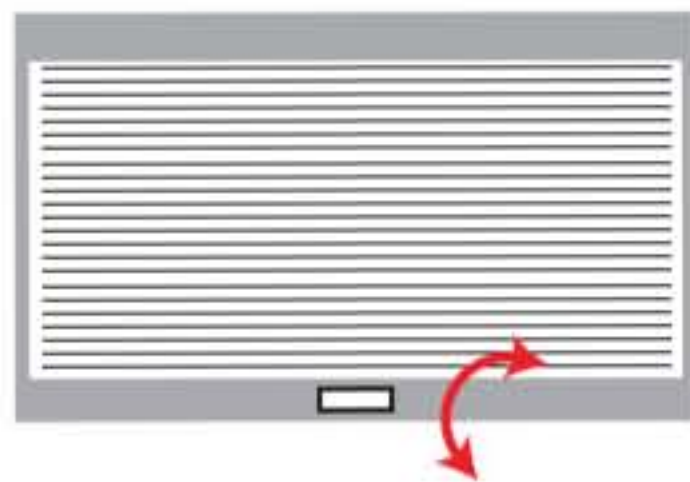

1105

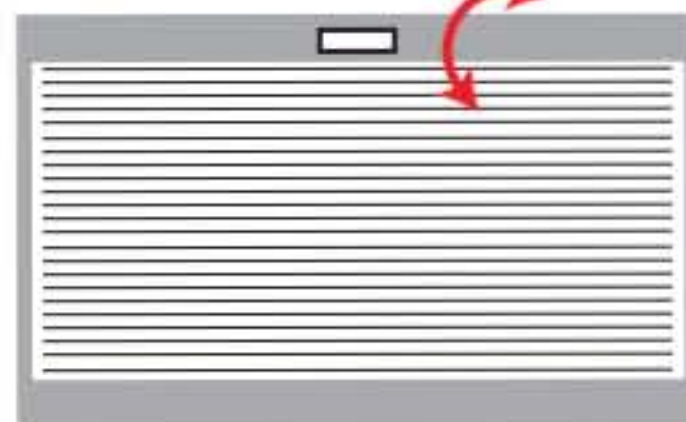

Profiles



Description	Type	Size in mm	Material
Head rail		32 x 25,4 x 17,6	PVC
Bottom channel		32 x 25,4 x 17,6	PVC
Frame		17,6 x 8	PVC
Magnetic holder profile		11 x 6	Aluminium