


Integrated Blinds

www.integratedblinds.com

Manual lifting and tilting

Product-line 1233

Slat width 16 mm, aluminium profiles

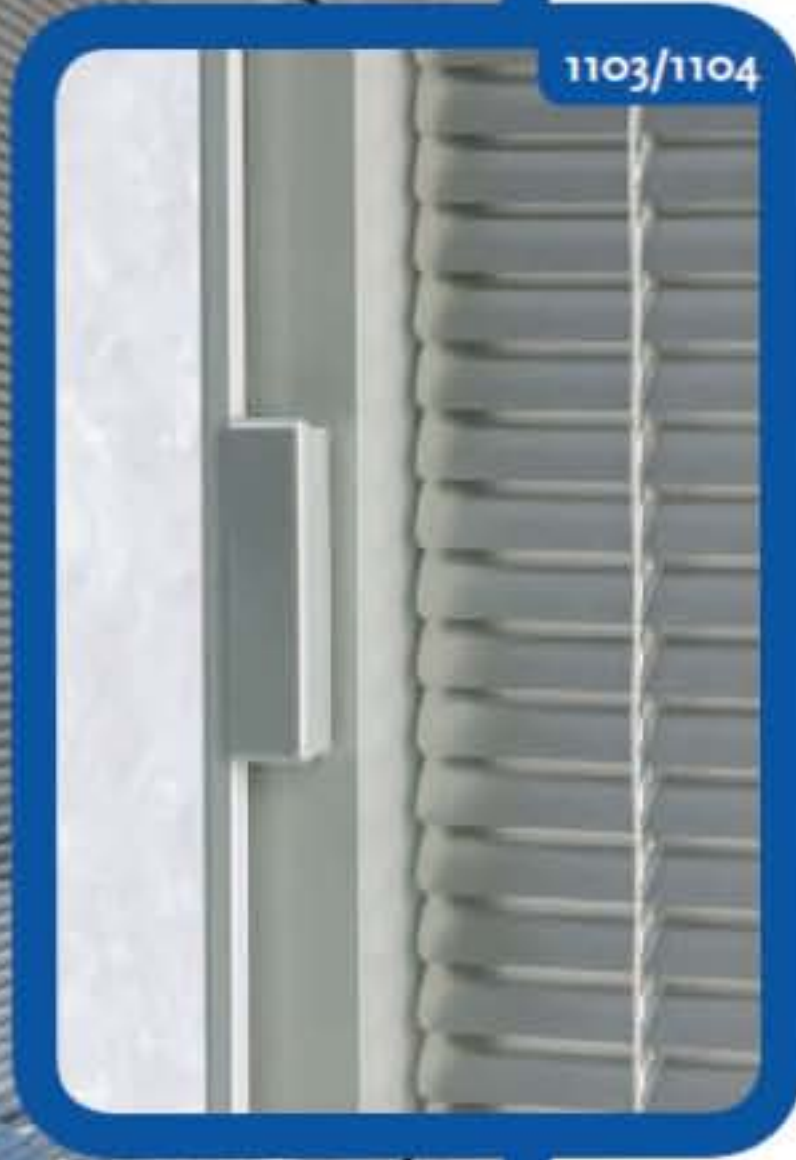


A complete venetian blind with 16mm wide slats for minimum stacking height. Complete control over quantity of light or shade in the room. Lifting from either left or right side. Tilting mechanism on opposite side. Depth of unit 25,4 mm for deep standard double-glazing windows. Aluminium frame.

Options

Orientation side 1103 Lifting right, tilting left
 1104 Lifting left, tilting right

Orientation system 1230 Magnetic handles

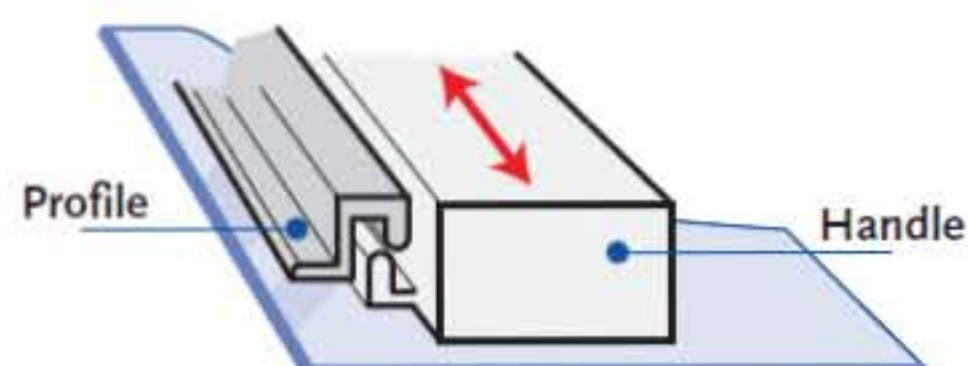

Properties

Slats Material Crowned high tensile aluminium
 Size Width 16 mm

Cords Cords Polyester 1,3 mm
 Ladder string Polyester width 18 mm
 Distance between ladder rungs 13 mm

Integral Blinds | Integrated Blinds | Interstitial Blinds

Integrated Blinds


www.integratedblinds.com

Manual lifting and tilting

Product-line 1233

Slat width 16 mm, aluminium profiles

General topics system AB1

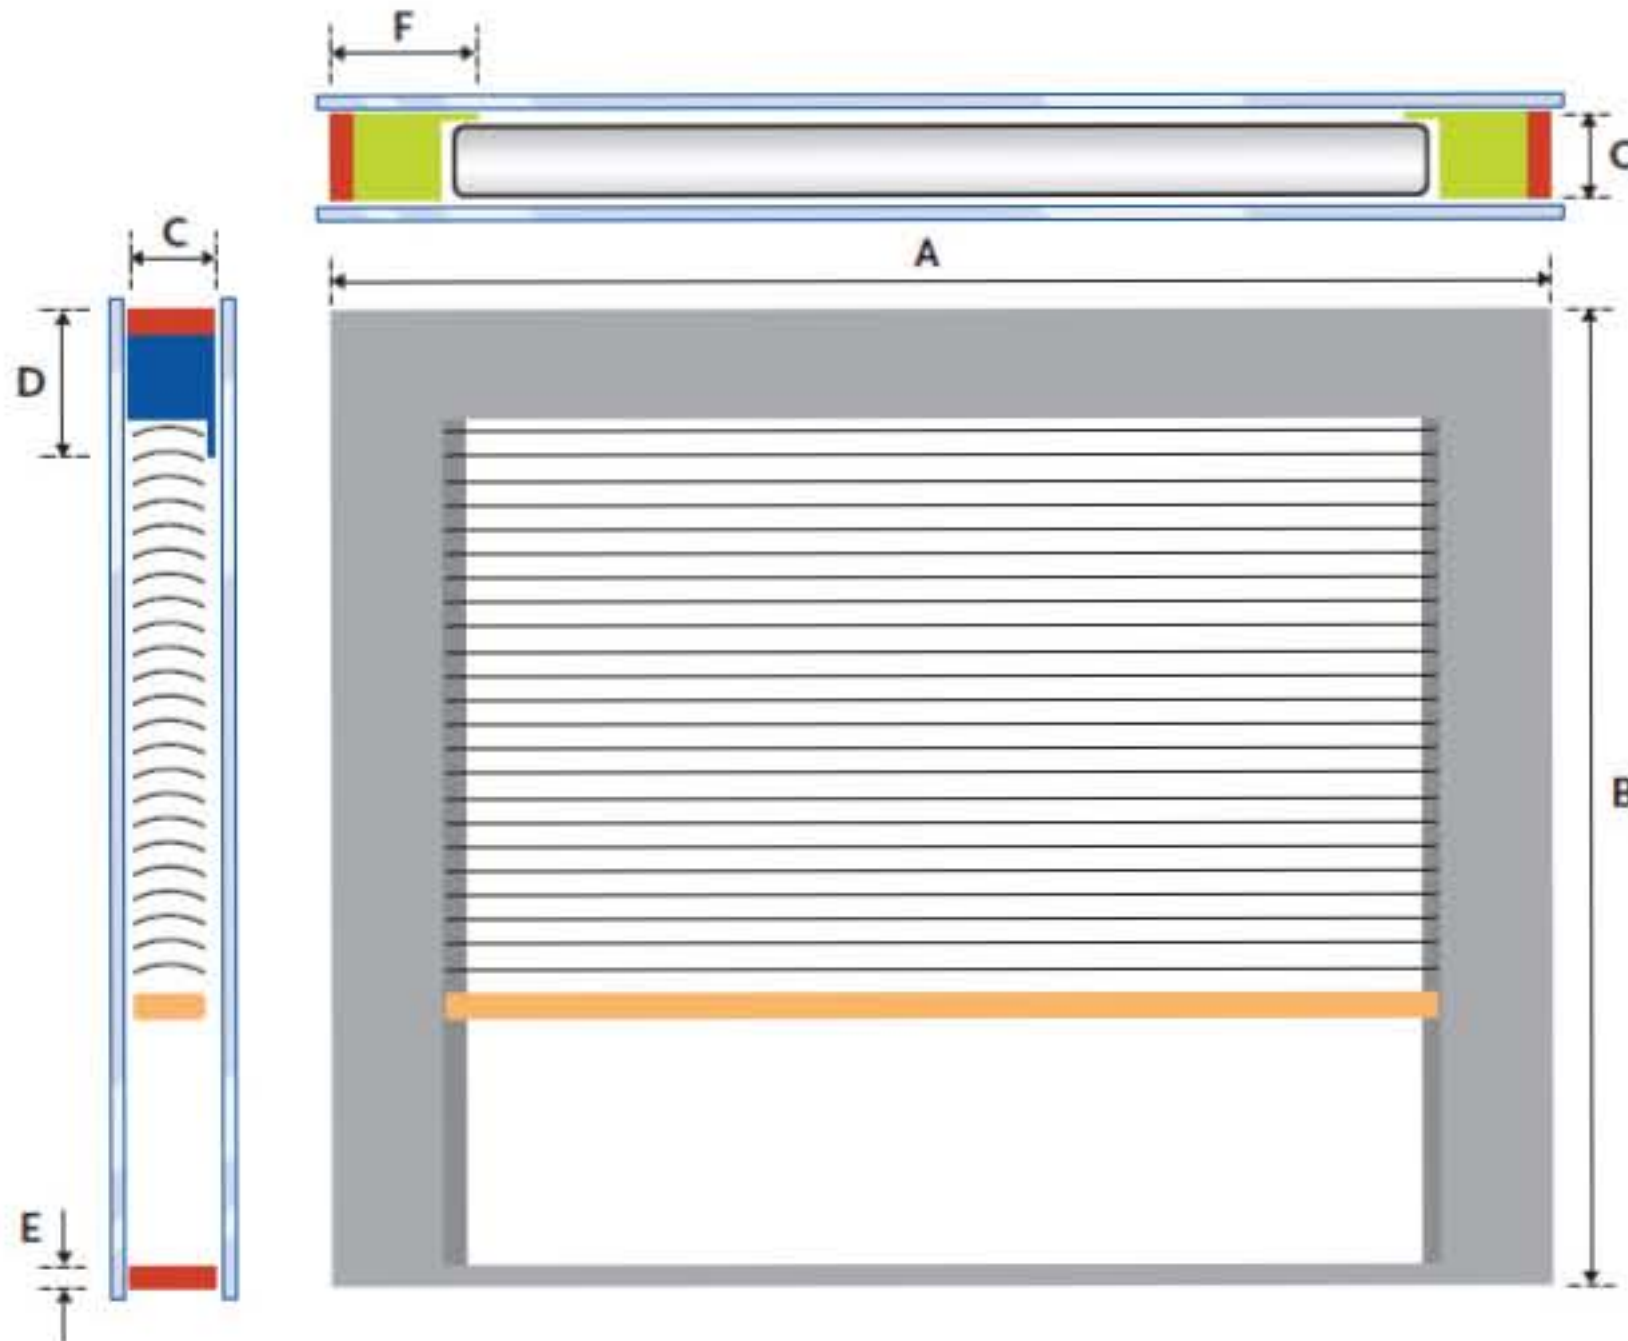


Ref.	Description	Size in mm
A	Width	As needed ¹⁾
B	Height	As needed ¹⁾
C	Depth	25,4
D	Top	53,0
E	Bottom	8,0
F	Side	40,0

- B**
- Head rail
 - Bottom rail
 - Side channel
 - Frame


Limitations in cm ¹⁾		
	Width	Height
Maximum	200	220
Minimum	30	50

Orientation sides

1103

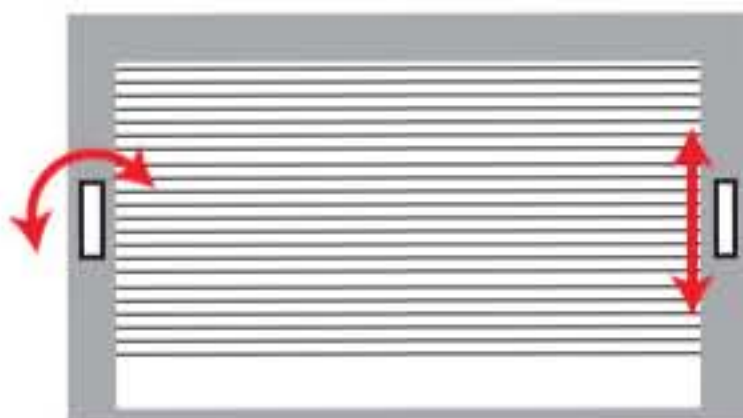

1104

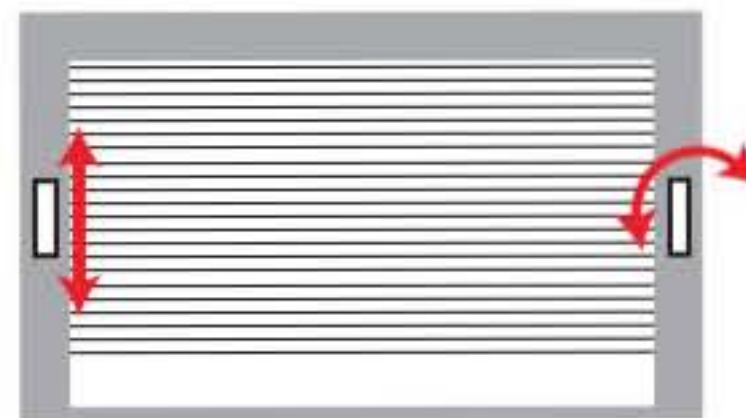

Stacking height in cm	
Blind height	Stacking height
50	7,0
100	8,5
150	10,0
200	11,5

Profiles



Description	Type	Size in mm	Material
Head rail		45 x 40 x 25,4	Aluminium
Bottom rail		16 x 12	Aluminium
Side channel		32 x 25,4 x 25,4	Aluminium
Frame		25,4 x 8	Aluminium
Magnetic holder profile		11 x 6	Aluminium